Vehicle Crossing Details - General Layout

3.0m

maximum

width of

crossina

NOTES:

WORKS WITHIN ROAD RESERVE PERMIT

Vehicle crossing construction must not commence prior to a Works Within Road Reserve permit being obtained. This is legislated by the Road Management Act 2004.

Insurance companies may not cover liability claims for works completed without consent. Financial penalties may apply if works are undertaken without a permit.

FOOTPATHS

Vehicle crossings must not be built through footpaths to ensure the footpath retains priority. In the event the footpath is damaged, it must be replaced by the Applicant responsible for the vehicle crossing works at their cost and must match the style of footpath directly adjacent.

CLEAR ZONES

A clear zone of 1.0m must be provided on each side of the crossing. Stormwater pits or any above ground infrastructure, including poles or utility cabinets, must not be located within the clear zone without upgrade and/or prior approval.

Relocation, modification or upgrade of any utility infrastructure or pedestrian crossing is at the expense of the Applicant.

STREET TREES

Vehicle crossings must not be constructed within 2m of an existing tree or within the tree protection zone (TPZ). The TPZ is calculated for each tree by multiplying its Diameter Breast Height (DBH) (trunk diameter measured at 1.4 metres up from ground level) by 12. For example, a crossing must not be constructed within 2.4m of a tree with a trunk diameter of 0.2m (20cms).

Replacement or relocation of street trees must not be undertaken without prior approval. If approval is granted, all associated costs are borne by the




IN-GROUND ASSETS WITHIN A VEHICLE CROSSING

Utility pits or hydrants, including telecommunications pits, electricity pits or fire hydrants, may be located within a vehicle crossing provided prior approval has been given by the relevant asset owner.

ABOVE GROUND ASSETS WITHIN A VEHICLE CROSSING

Pedestrian ramps or any above ground infrastructure, including poles or utility cabinets, must not be located within a vehicle crossing under any circumstance.

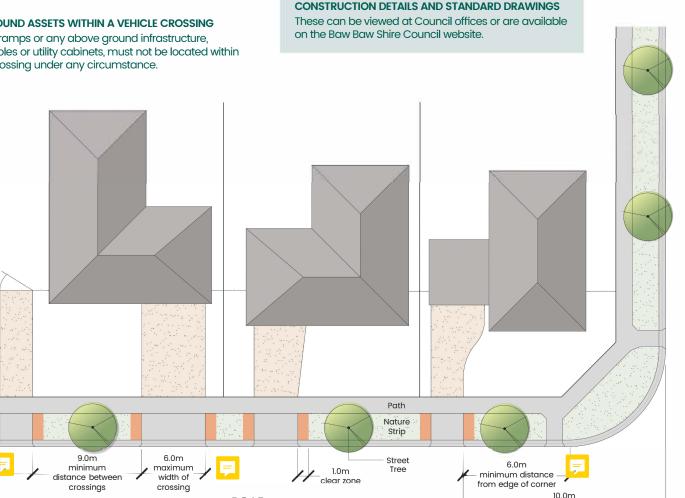

ROAD

minimum distance from edge of side road

